


uscce
M01-RGB User Manual

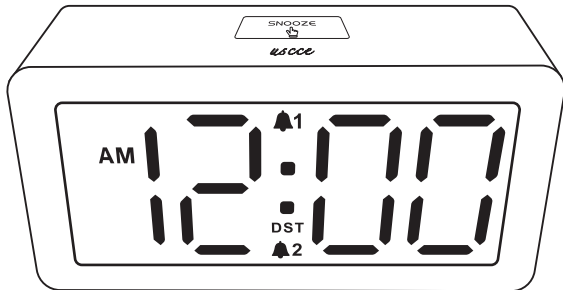

18-month Warranty

After-sales mailbox:


support@uscce.com

Thank you for purchasing USCCE!


Please read these instructions carefully before use and retain for future reference.

Version 1.0

FRONT VIEW

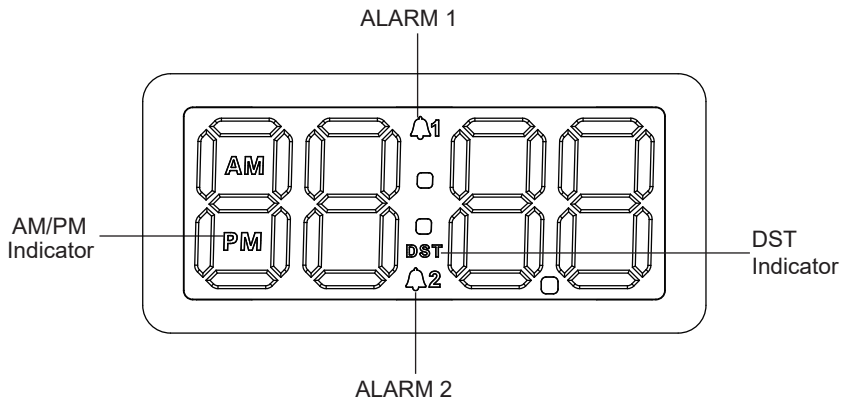


BACK VIEW

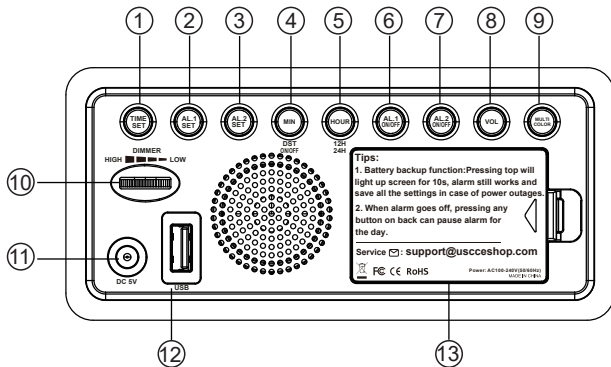

- ① **TIME SET:** enter time setting
- ② **AL.1 SET:** enter alarm 1 setting
- ③ **AL.2 SET:** enter alarm 2 setting
- ④ **MIN:** set minute
DST ON/OFF: 1 hour forward/back
- ⑤ **HOUR:** set hour
12H 24H: regular time/military time format
- ⑥ **AL.1 ON/OFF:** turn alarm 1 on/off

- ⑦ **AL.2 ON/OFF:** turn alarm 2 on/off
- ⑧ **VOL:** adjust alarm volume
- ⑨ **MULTI COLOR:** adjust RGB color
- ⑩ **DIMMER:** adjust the display brightness
- ⑪ **POWER CONNECTOR**
- ⑫ **USB CHARGING PORT**
- ⑬ **BATTERY COVER**


TOP VIEW

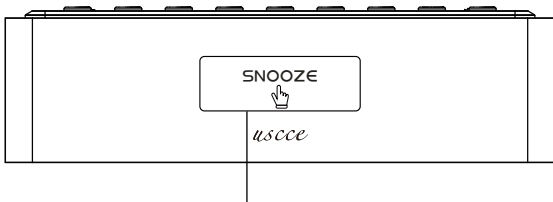

TOUCH TO ACTIVATE SNOOZE

ITEMS COME IN THE BOX

1. Wooden Digital Alarm Clock ×1



2. Power Adapter ×1



3. User Manual ×1



PRODUCT SPECIFICATIONS

Dimensions: 5.9(L)*1.65(W)*2.8(H)inches

N Weight: 0.5lb

Clock accuracy: ± 13 seconds/month(in normal temperature)

Material: Plastic+Electornic

Power Input: DC, 5V/1A

Power: AC, 100-240V(50/60Hz)

USB Output: 5V/1A

POWER SUPPLY: CORDED ELECTRIC +BATTERY BACKUP

This item needs to be used with batteries and electric power. The batteries have backup function, which means touch the top will light up screen for 10s, the alarm stills works and save all the settings in case of power outages.


FEATURES

- RGB dynamic display with 0-100% dimmer
- Dual alarm with 5 volume adjustable and snooze
- Regular time/military time
- USB charging port
- Manual DST
- Easy to set


GETTING STARTED

There are two steps to start the clock.

1. Properly place 3 AAA new alkaline batteries(NOT included) in the battery compartment, cover back.

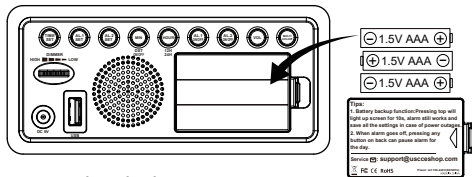

2. Connect the power to start the clock.

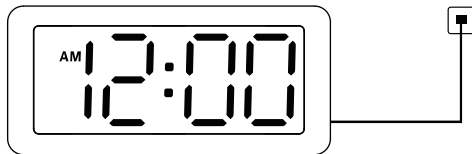


NOTE:


1. For battery and energy saving, the screen of this model will not stay on all the time when powered only by batteries.
2. The battery has a backup function that ensures that the alarm goes off and saves all settings in the event of a power outage.
3. Clock has all functions except for USB charging your electronic device when powered only by batteries.

CHOOSE REGULAR/MILITARY TIME

In non-setting mode, each push of [12H 24H] button can switch the time display format in regular time(12-hour) or military time(24-hour).

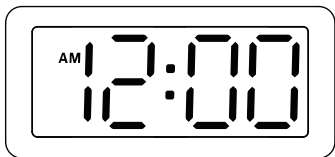

REGULAR TIME

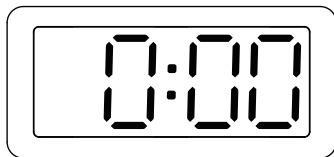


MILITARY TIME

NOTE:

In regular time, AM or PM will display. Otherwise clock is in Military Time.

SETTING CLOCK TIME

1. Press **[TIME SET]**, HOUR and MINUTE digits start blinking, set current HOUR with **[HOUR]** button and set current MINUTE with **[MIN]** button. Press and hold for fast adjustment.

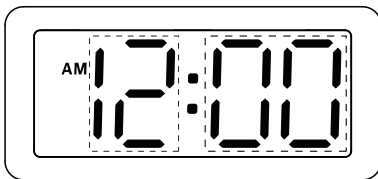

Set HOUR and MINUTE digits

2. Press **[TIME SET]** to exit and save the time.


NOTE:

If no buttons are pressed within 15 seconds, time setting mode will end up automatically. Clock will save and display current time you set.

SETTING ALARM TIME

ALARM 1 and ALARM 2 are setting in the same way.

1. Press **[AL.1 SET]**, ALARM HOUR and MINUTE digits start blinking, set current alarm-hour with **[HOUR]** button and set current alarm-minute with **[MIN]** button. Press and hold for fast adjustment.

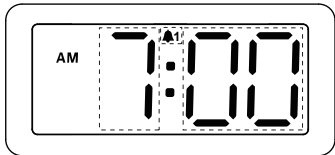

Set ALARM HOUR and MINUTE digits


2. Press **[AL.1 SET]** to exit and save the alarm 1 time.

NOTE:


If no buttons are pressed within 15 seconds, alarm setting mode will end up automatically. Clock will save and display current time you set.

TURNING ALARM ON/OFF

In non-setting mode, each push of [AL.1 ON/OFF] [AL.2 ON/OFF] button can turn on or disable the alarm.





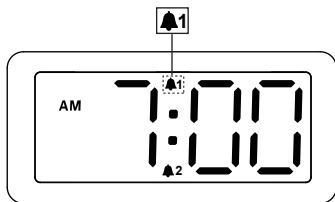


ALARM ON

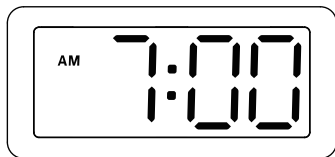


ALARM OFF

ALARM VOLUME



Press the button of [VOL] button to adjust the alarm volume. There will be a five-second trial listen for alarm volume.

PAUSE ALARM AND RESET FOR THE NEXT DAY

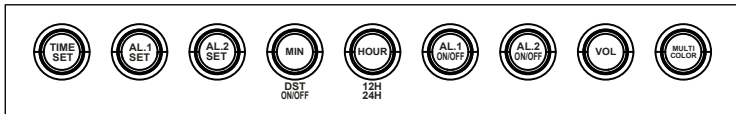

When alarm goes off, press any of the 9 buttons backside to pause it, or let the alarm stops on its own. This will re-set the alarm for the next day.

NOTE:

If not stop the alarm, it will last 15mins before going silent.

SNOOZE FUNCTION



When alarm goes off, touch the top **[SNOOZE]** to temporarily suspend the alarm for 9 minutes. Snooze can be repeated once again and again.


Press any button on the back to end the Snooze Function.

SETTING MULTICOLOR

The color of the display can be freely selected for you with each press of **[MULTI COLOR]** button. There will be 9 colors for your reference:

C01=RGB Fixed, C02=Red, C03=Green, C04=Indigo, C05=Blue, C06=Purple,
C07=RGB Changing, C08=RGB Flowing, C09=Loop Color.

DIMMER




The brightness of the screen can be freely selected for you by sliding the **[DIMMER]** knob on the back.


DST

1. In Summer time, press the **[DST ON/OFF]** button once to turn on DST function, the DST will display on the screen, time will go forward one hour.

2. In Winter time, press the **[DST ON/OFF]** button once to turn off DST function, the DST will disappear, time will go backward one hour.

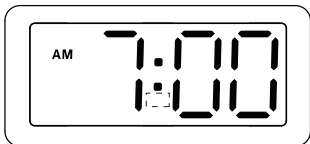

DST OFF
(DST DEFAULT VALUE:OFF)

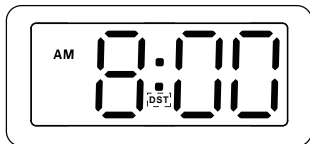

DST ON
(1 HOUR FORWARD)

TROUBLESHOOTING

1. Alarm doesn't go off at the set time

- Check if the alarm is set to AM or PM time.
- Check if the alarm is turned on.
- Press **[VOL]** button to set alarm volume at "L05".
- Get customer support for help

2. Display doesn't light up when powered by adapter

- Check if the power connection is loosed or not.
- Check if the power outlet is working.
- Change another power outlet to try again.
- Slide **[DIMMER]** knob to set display brightness to high position.
- Get customer support for help.

3. Display doesn't light up when powered by batteries

- Touch the top **[SNOOZE]** will activate display for 10s.
- Check if the batteries are drained and replace them.
- Get customer support for help.

Important: Adapter is needed to keep the clock working. Batteries are for memory backup only.

WARRANTY SUPPORT

Any reason unsatisfied, feel free to contact us at:

support@uscceshop.com

USCCE customer service is always open for you.



Warranty Card

| Product Warranty Card | |
|-----------------------|--|
| User Name | |
| Product Model | |
| Purchase Method* | <input type="checkbox"/> Amazon <input type="checkbox"/> Other |
| Order Number* | |
| Purchase Time | |
| Warranty Time | |

Note:* Options are required

Contact Us To Activate Your 18-Month Warranty Now!

Email  **support@uscce.com**

Visit  **www.uscce.com**

Visit  www.uscce.com for 18-month Warranty

- ★ Get your 18-month warranty.
- ★ Get products authenticity verified.
- ★ Get limited-time discounts (if any).
- ★ Get your thoughts shared. Every voice matters.
- ★ Get a copy of the user manual for future reference.

uscce

CUSTOMER SUPPORT

support@uscce.com